



Instruction Manual for Optical Fiber Connector Cleaner “CLETOP-S Replacement Cartridge”

This is the special tape cartridge of the optical fiber connector cleaner named CLETOP-S replacement Cartridge.
Please replace the cartridge (cleaning cloth) with a new one according to the following procedure.


 Prohibited	<ul style="list-style-type: none"> • Do NOT store in direct sunlight, and avoid hot and/or humid environments as the product may become deformed. • Do NOT touch the tape (cleaning tape). The quality will deteriorate. • Do NOT disassemble this product. • Do NOT use for any purpose which has not been described in this manual. Products may be damaged. • Please consign this product to a properly licensed waste management operator.
--	---

1. Name of each part

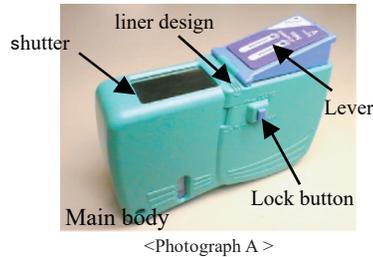

2. How to replace the cartridge

- (1) Slide the lock button to right side while pressing the blue part (direction of → Push button to open) to open the lid of the main body. <Photograph C >

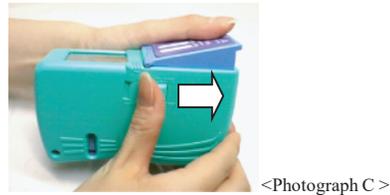


- (2) Put your thumb on the liner designed part and open the lid. <Photograph D >
*If you try to open the lid from both sides, it may be difficult to open. <Photograph E >



- (3) Take out the used tape cartridge by tilting the main body. <Photograph F >



- (4) Pull in the slack of the tape by moving the take-up reel to the direction of white arrow before setting it into the main body. <Photograph G >
Set new cartridge into the main body. <Photograph H >

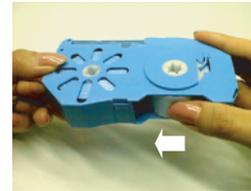

- (5) Close the main body lid by pressing the upper corners of the lid <Photograph I > and slide the lock button to left side. <Photograph J >



- (6) Press the lever a few times to confirm that tape is being wound correctly.



* CLETOP is a trademark of NTT Advanced Technology Corporation.

• Inquiries
NTT Advanced Technology Corporation
https://keytech.ntt-at.co.jp/en/optic1/index_s.html

